

5 μ H Air Core Inductor – 5uH

Datasheet



In Compliance with

> GMW 3172

Introduction

Air core inductor 5uH is used for measurement of grounding self-inductive effect as per GMW 3172.

Features

- > Easy connection and operation
- > Portable

Application Areas


- > IT
- > Telecom
- > Power generation
- > New energy automotive

Technical Parameters

Inductance	5 μ H
Rated Voltage	DC 50 V
Rated Current	50 A
Dimension	220 x 160 x 170 mm
Weight	Approx. 2.2 kg

Standard Accessories	
Testing Wire	1 pc
Quality Guarantee	1 pc
Factory Inspection Report	1 pc
User Manual	1 pc

Equipment Connection Diagram

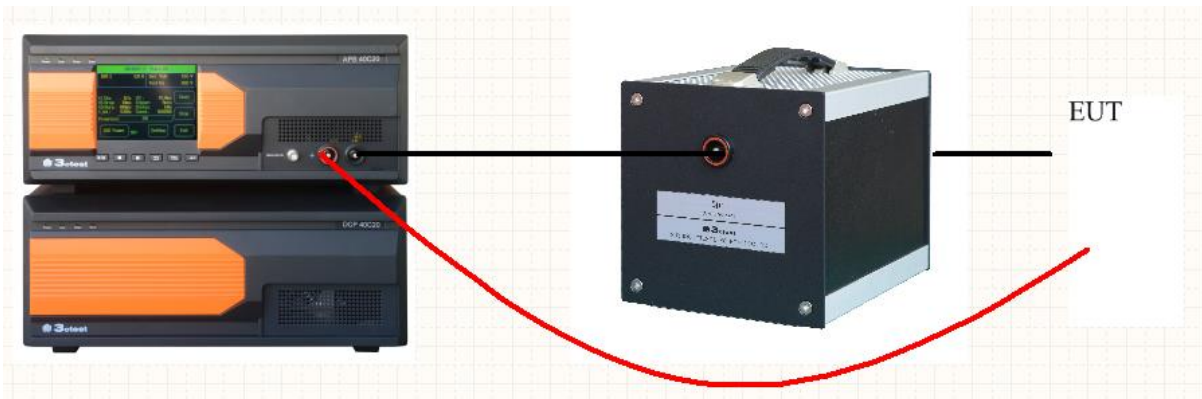



SUZHOU 3CTEST ELECTRONIC CO., LTD.

Add.: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China

Tel: +86 (0)512 6807 7192 Fax: +86-512-68079795

Sales Email: globalsales@3ctest.cn Service Email: service@3ctest.cn

www.3c-test.com

3ctest is always striving for product innovation and quality improvement.

Product appearance and technical specifications are subject to change without further notice.

© 3ctest