



# Load Dump Pulse Simulator

## LDS 300NxxD Series

- QC/T 727-2007
- JASO-D001-94

### — Features

---

- > 5.7-inch color touch screen front panel operation;
- > CN25 and CAN bus can transmit DUT's voltage signal to power supply terminals, and be used for communication with equipment of other brands;
- > DUT voltage/current detection, and over-current protection.

### — Introduction

---

The LDS 300NxxD is designed for testing of pulse type A-1, B-1, C-1(D-1), D(E) as per JASO D001-94, QC/T 727-2007 for automotive meters such as speedometer, tachometer, fuel meter etc. It features touch screen operation and easy test setting.

### — Application Areas

---



## Technical Parameters

QC/T 727 Type A-1 (JASO Type A-1)	
Pulse Amplitude - Vp	80 V
Tolerance (Vp)	≤10%
Rise Time - Tr (Vp)	<1 μs
Decaying Time Constant - τ	200000 μs
Output Impedance- R1	0.8 Ω
Number of Pulses	1
Polarity	Positive
QC/T 727 Type B-1 (JASO Type B-1)	
Pulse Amplitude - Vp	80 V
Tolerance (Vp)	≤10%
Rise Time - Tr (Vp)	<1 μs
Decaying Time Constant - τ	60000 μs
Output Impedance - R1	8 Ω
Number of Pulses	100
Repetition Frequency	1/30 Hz
Polarity	Negative
QC/T 727 Type C-1 (JASO Type D-1)	
Pulse Amplitude - Vp	110 V
Tolerance (Vp)	≤10%
Rise Time - Tr (Vp)	<1 μs
Decaying Time Constant - τ	400000 μs
Output Impedance- R1	1.5 Ω
Number of Pulses	1
Polarity	Positive
QC/T 727 Type D (JASO Type E)	
Pulse Amplitude - Vp	- 320 V
Tolerance (Vp)	≤10%
Rise Time - Tr (Vp)	<1 μs
Decaying Time Constant - τ	26000 μs
Output Impedance - R1	210 Ω
Number of Pulses	100
Repetition Frequency	1/30 Hz
Polarity	Negative

### General parameters

Power Supply	AC 110 V / 220 V $\pm$ 10%, 50 Hz /60 Hz ( $\pm$ 5%) (AC 220 V 50 Hz in mainland China)
Ambient Temperature	15 °C ~ 35 °C
Relative Humidity	45% ~ 75%
Atmospheric Pressure	86 kPa ~ 106 kPa
Dimension	2*6U rack (450x600x266 mm)
Weight	Approx. 60 kg


### Standard Accessories

Test line, Earth line, Radio frequency cable, Power supply line, Fuses (spare parts), User manual
---


### Optional Models

LDS 300N30D&LDS 300D	DUT Max. power supply:60 V 30A
LDS 300N50D&LDS 300D	DUT Max. power supply:60 V 50A
LDS 300N75D&LDS 300D	DUT Max. power supply:60 V 75 A
LDS 300N100D&LDS 300D	DUT Max. power supply:60 V 100 A

### Waveforms

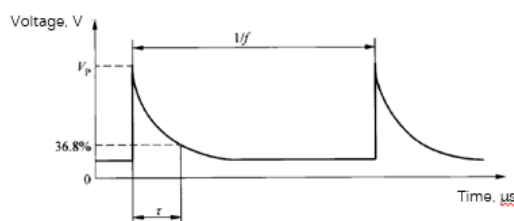

Type A & C

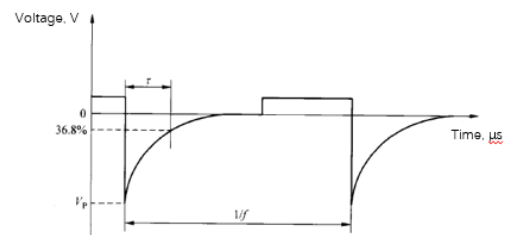

Type B & D

## SUZHOU3CTEST ELECTRONIC CO., LTD

Address: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China  
 Sales Email: [globalsales@3ctest.cn](mailto:globalsales@3ctest.cn) Service Email: [service@3ctest.cn](mailto:service@3ctest.cn)  
 Tel: + 86 - 512 - 68077192 Web: [www.3c-test.com](http://www.3c-test.com)

